

# 6 Step - 1500mm


## Product Overview

Z/STEP/6STEP

VAT Not Included  
Free Delivery

### Step Width

500mm - Standard  
850mm - Wide

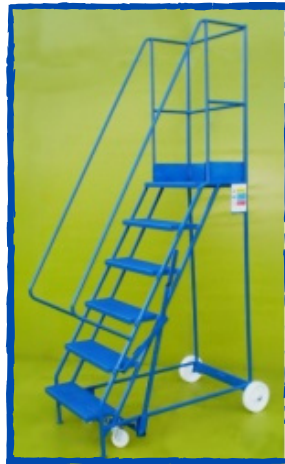

### Options

Rubber Wheels  
RUGGED Wheels  
Swing out Rear Stabilisers  
Front Levelling Legs  
Galvanize  
Bottom Gate  
Rear Safety Bar  
Climb Prevention Bar  
Basket

Mobile Steps lead time is generally 7 days. Whilst we stock the step components, the mobile steps are built to order. We would typically allow 3 days to build the steps, a day to paint them and then despatch the mobile ladders on a 3 day service.

Specification		
Dimensions	Standard Step Width (550mm)	Wide Step Width (850mm)
Platform Height From Ground	1500mm	1500mm
Overall Length	1400mm	1400mm
Overall Height	2500mm	2500mm
Frame Width	590mm	890mm
Overall Axle Width	760mm	1060mm
Platform Size	550mm x 380mm	850mm x 380mm
Step Tread Width	550mm x 200mm	850mm x 200mm
Step Tread Vertical Spacing	250mm	250mm
Weight Standard Width	62kg	
Load Capacity	300kg	300kg

- ▶ These mobile safety steps are fabricated in one rigid structure giving good inherent strength
- ▶ Easy to manoeuvre with 2 large 200mm nylon wheels and 2 smaller 100mm wheels housed in swivel castors.
- ▶ The mobile ladder is fitted with our industrial hi-grip step as standard, also a 100mm kick-plate and safety operating sticker.
- ▶ Mobile steps are painted as standard using a one coat primer/finish - Zinfos 700CT, or can be galvanized.