


5 Step Lorry Access

Product Overview

Z/STEP/LORRY/5

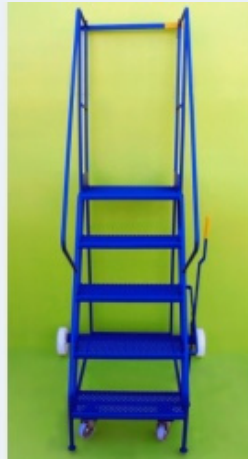

Step Width

500mm - Standard
850mm - Wide

VAT Not Included
Free Delivery

Options

Rubber Wheels
RUGGED Wheels
Galvanized
Climb Prevention Bar
Bottom Gate
Rear Safety Swing Out
Rear Stabilisers
Front Levelling Legs

Mobile Steps lead time is generally 7 days. Whilst we stock the step components, the mobile steps are built to order. We would typically allow 3 days to build the steps, a day to paint them and then despatch the mobile ladders on a 3 day service.

Specification		
Dimensions	Standard Step Width (550mm)	Wide Step Width (850mm)
Platform Height From Ground	1250mm	1250mm
Overall Length	1250mm	1250mm
Overall Height	2250mm	2250mm
Overall Axle Width	1080mm	1380mm
Platform Size	550mm x 380mm	850mm x 380mm
Step Tread Width	550mm x 200mm	850mm x 200mm
Step Tread Vertical Spacing	250mm	250mm
Weight Standard Width	55kg	
Load Capacity	300kg	300kg

- Fitted with 2 substantial 200mm nylon wheels and 2 smaller 100mm diameter wheels housed in swivel castors allowing easy movement
- On the side is mounted a brake lever which disengages the smaller wheels when in use allowing a safe stable platform
- Also fitted is a safety rail at the top and safety notice on the side.
- There are 2 lever brakes mounted within the structure which disengage each pair of wheels.
- Mobile steps are painted as standard using a one coat primer/finish - Zinfos 700CT, or can be galvanized.