


# 3 Step Spring Loaded

## Product Overview

Z/STEP/3SPRUNG

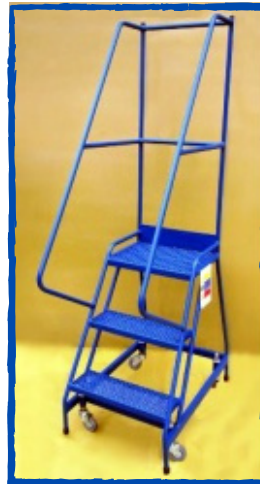

VAT Not Included  
Free Delivery

Mobile Steps lead time is generally 7 days. Whilst we stock the step components, the mobile steps are built to order. We would typically allow 3 days to build the steps, a day to paint them and then despatch the mobile ladders on a 3 day service.

Specification	
Platform Height From Ground	750mm
Length	970mm
Overall Height	1750mm
Overall Step Width	510mm
Platform Size	400mm x 300mm
Step Tread Vertical Spacing	250mm
Weight	24kg
Load Capacity	300kg

- Narrow Aisle mobile steps fitted with spring loaded castors which retract when the operator's weight is placed on the steps.
- 75mm rubber tyre wheels fitted as standard and different spring rates for the front and rear castors to help balance the weight of the steps
- The legs are fitted with rubber feet which bottom out on the ground when the mobile steps are stood on.
- Handrails are fitted to both sides of the mobile steps with 1m high handrails around the top step platform. The narrow steps incline is 45 degrees to allow easy climbing up and down.
- High grip steel treads with punched and raised holes, offering very high levels of grip for all shoe types