

14 Step -3500mm

Product Overview

Z/STEP/14STEP

VAT Not Included
Free Delivery

Step Width

500mm - Standard

850mm - Wide


Access Platform Options

Forward Access

Right Access

Left Access

Left & Right Access

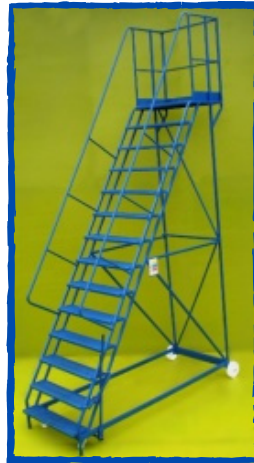

Options

Rubber Wheels

RUGGED Wheels

Swing out Rear Stabilisers

Front Levelling Legs

Galvanize

Access Platform

Rear Safety Bar

Climb Prevention Bar

Bottom Gate

Basket

Mobile Steps lead time is generally 7 days. Whilst we stock the step components, the mobile steps are built to order. We would typically allow 3 days to build the steps, a day to paint them and then despatch the mobile ladders on a 3 day service.

Specification		
Dimensions	Standard Step Width (550mm)	Wide Step Width (850mm)
Platform Height From Ground	3500mm	3500mm
Overall Length	2670mm	2670mm
Overall Height	4440mm	4440mm
Frame Width	600mm	900mm
Overall Axle Width	1020mm	1320mm
Platform Size	550mm x 380mm	850mm x 380mm
Step Tread Width	550mm x 200mm	850mm x 200mm
Step Tread Vertical Spacing	250mm	250mm
Weight Standard Width	130kg	
Load Capacity	300kg	300kg

- These mobile safety steps are fabricated in one rigid structure giving good inherent strength
- Easy to manoeuvre with 2 large 200mm nylon wheels and 2 smaller 100mm wheels housed in swivel castors.
- The mobile ladder is fitted with our industrial hi-grip step as standard, also a 100mm kick-plate and safety operating sticker.
- Mobile steps are painted as standard using a one coat primer/finish - Zinfos 700CT, or can be galvanized.